
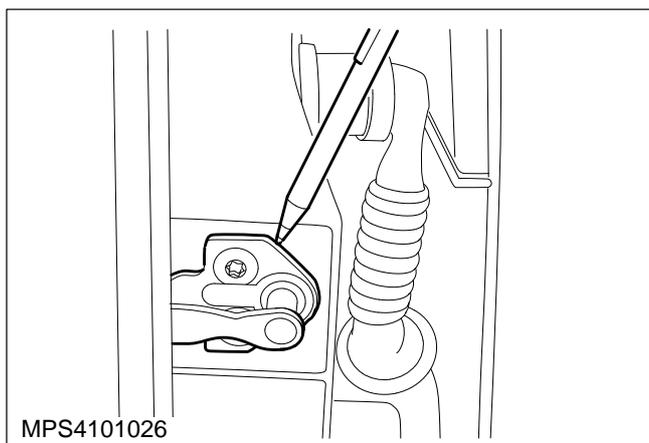



Plate – Door Striker – Remove and Install (41 356 0)**Remove**

- 1. Using a suitable marker pen, mark the position of the striker.**

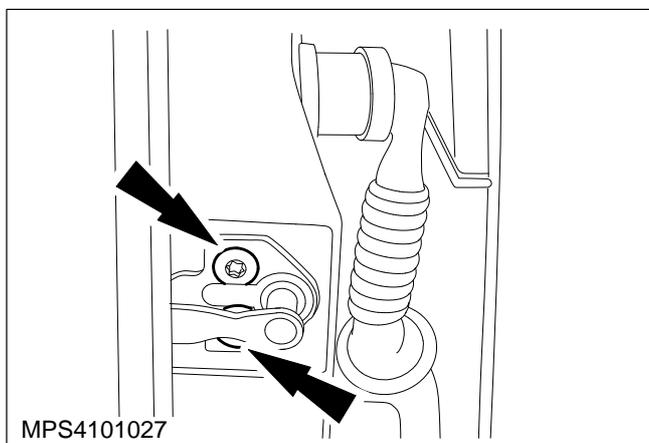

- 2. Remove the striker plate.**

Two torx screws.

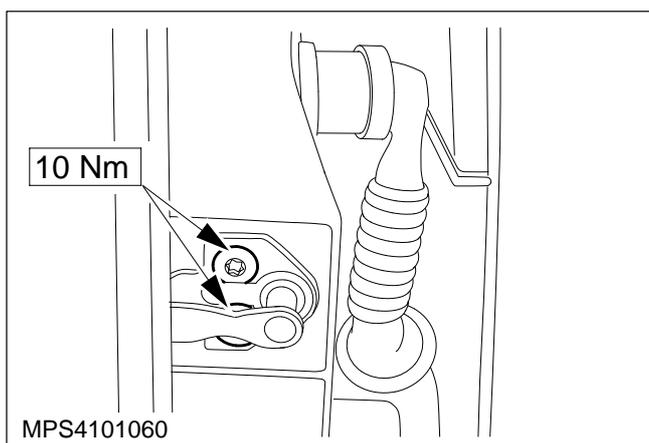**Install**

- 3. Refit the components in reverse order.**

Do not fully tighten the two torx screws until the striker is aligned with the markings.