

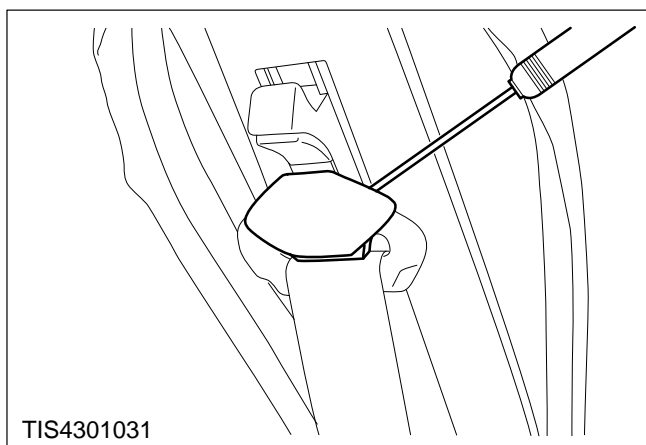


B – Pillar Trim (Upper) – Remove and Install (43 617 0)**Remove**


- 1. Prise off the seat belt upper mounting bolt cover.**

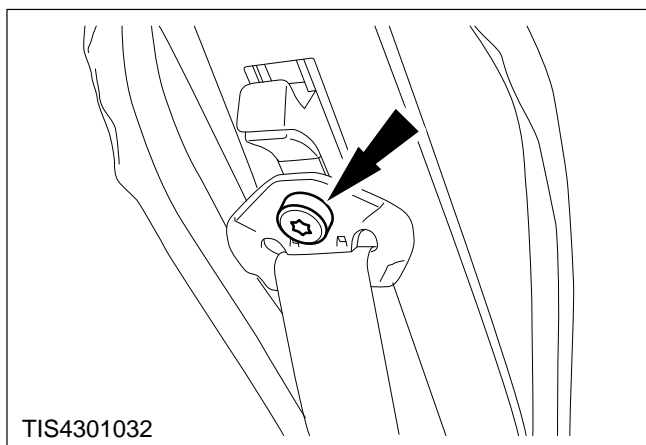

- 2. Remove the seat belt upper mounting bolt.**
- 3. Locally detach the door weatherseals.**

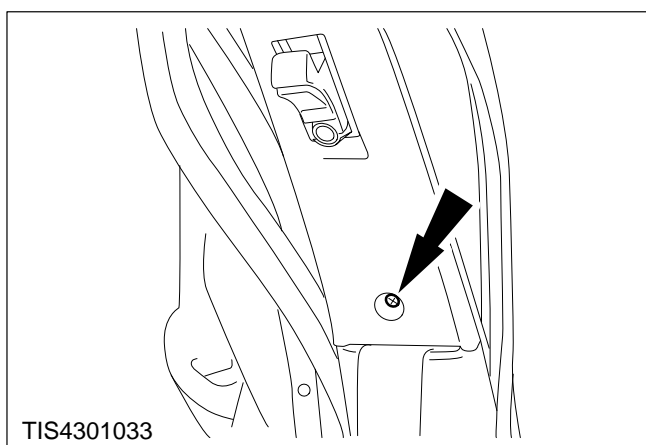

- 4. Remove the trim securing screw.**

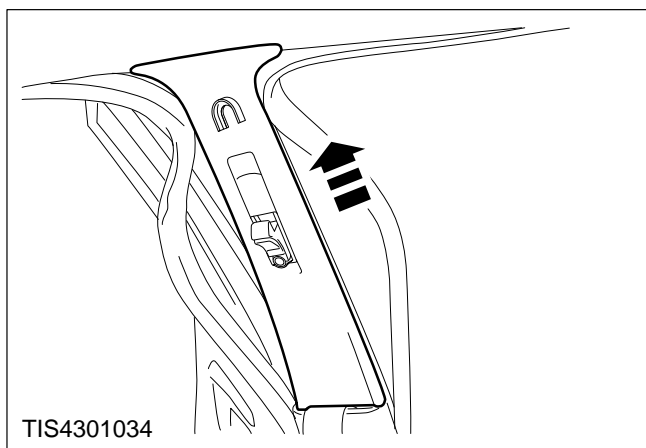

- 5. Remove the trim by gently pulling upwards to disengage the clip.**

Install

- 6. Refit the components in reverse order.**