



Radio Loudspeaker – Front Door – Remove and Install (38 268 0)

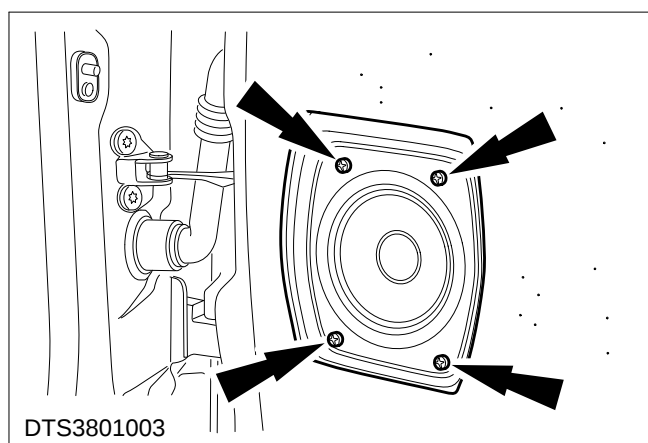

Remove

1. Remove the front door trim panel (refer to Operation Number 43 705 0).
2. Detach the loudspeaker (four screws).

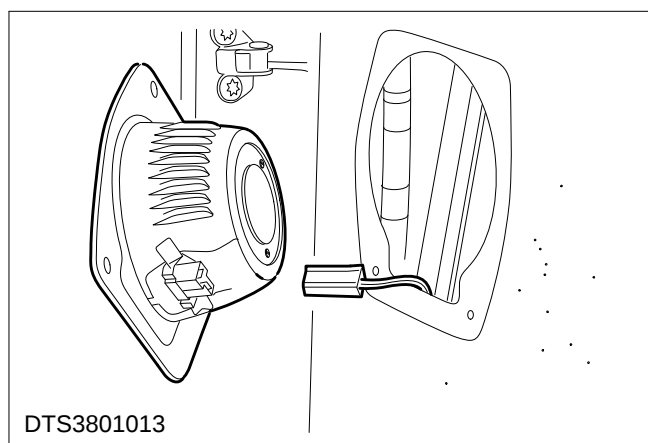

CAUTION: When disconnecting the multiplugs do not pull on the wiring; pull on the multiplug body.

3. Disconnect the loudspeaker lead and remove the loudspeaker.

Install

4. Refit the components in reverse order.